

BUB-NS Series

Bubbler Nozzle:


BUB-NS Series Bubbler Nozzle provides an aerated mound of water.

Specification:

BUB-NS Series Bubbler Nozzle, copper construction, water level dependent spray effect, FNPT connection.

- Water Level Dependent - Yes
- Wind Resistance - Very Good
- Sound Level - Moderate
- Clogging Potential - Low
- Splash Radius - 1.5

Material: Copper
Finish: Natural copper




Details

Model Number	NPT	Inches		Feet	Spray Height								
		A	B		.25	.5	.75	1	1.25	1.5	1.75	2	
BUB-NS-100	1"	4	3	GPM	11	15	20	23					
				Head Ft.	2	4	6	7					
				Spread - Ft.	.2	.75	1	1.5					
BUB-NS-150	1½"	5	4	GPM		40	49	55	60	65			
				Head Ft.		4	6	7	10	11			
				Spread - Ft.		.83	1	1.5	1.67	2			
BUB-NS-200	2"	6	5	GPM		50	58	65	70	75	80		
				Head Ft.		4	6	7	8	9	11		
				Spread - Ft.		1	1.25	1.5	1.67	2	2.5		
BUB-NS-300	3"	7	6	GPM				135	149	162	171	180	
				Head Ft.				6	8	9	11	12	
				Spread - Ft.				1.67	2.34	3	3.25	3.5	

Highlighted sections indicate optimum performance

TECHNICAL NOTES:

1. BALL VALVE AS REQUIRED PER DESIGN FOR DISCHARGE FLOW CONTROL.
2. WATERSTOP FITTING REQUIRED FOR CONCRETE POUR. SIZE BASED ON PIPING AND NOZZLE SIZE. (SEE CATALOG ITEM: FWS-SERIES)
3. TYPICAL WATER DEPTH SHOWN MAY VARY. CONTACT FOUNTAIN PEOPLE FOR SHALLOWER APPLICATIONS.
4. MAY REQUIRE WAVE BAFFLE FOR SYMMETRICAL SHAPED POOLS. CONSULT FOUNTAIN PEOPLE FOR SPECIFIC APPLICATIONS.
5. THIS NOZZLE IS WATER LEVEL DEPENDENT.

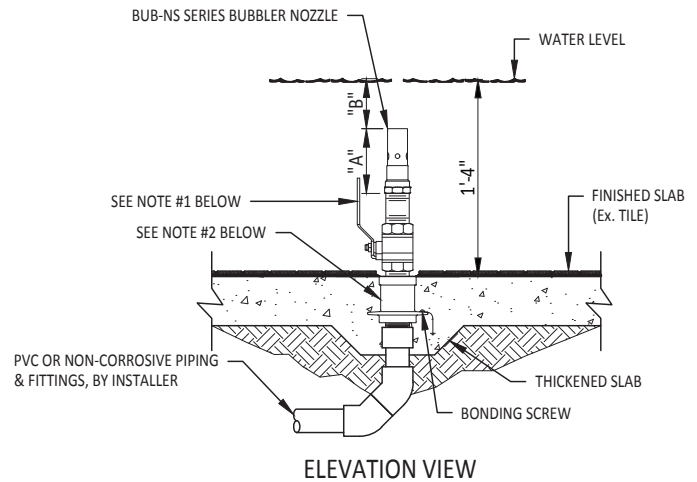

2021-01